



Application and Sales Office:

29235 Lorie Ln. PO Box 1013

Wixom, MI 48393-1013


Phone 248-344-7236

Fax 248-344-9401

E-Mail: tbradley@cdims.com

CDH-R-126-1.0-Mobile-Dry Units

<u>Model</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
CDH-R-126-1.0-E	1,000	Electric	80 3/4"	29 1/8"	40"	525 lbs

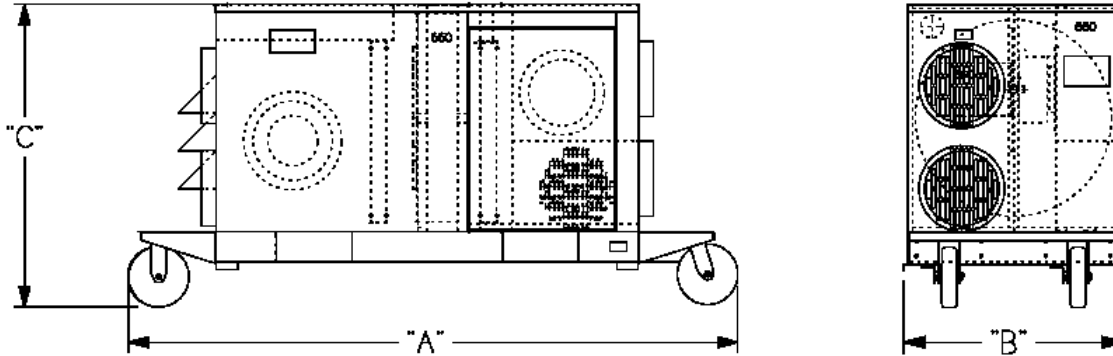

Air Volume	Static Pressure External	Moisture Removal Lbs/Hr 80°/60% RH	Moisture Removal Gallons/Day 80°/60% RH	Moisture Removal Lbs/Hr 55°/80% RH	Moisture Removal Gallons/Day 55°/80% RH	Moisture Removal Lbs/Hr 40°/80% RH	Moisture Removal Gallons/Day 40°/80% RH
1,000	2.0	20	58	15	43	10	29

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation Load 230/1/60	Electric Reactivation FLA Load 460/3/60	Gas Reactivation FLA Load 460/3/60	CFH Gas Max Usage NG	Gallon/HR Max Usage LP
1/2"	N/A	N/A	80	30	N/A	N/A	N/A



Available Accessories:

- (2) Swivel Locking and (2) Fixed Castors
- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting
- 10" Round Connections
- 12" Round Connections