



Application and Sales Office:

29235 Lorie Ln. PO Box 1013

Wixom, MI 48393-1013


Phone 248-344-7236

Fax 248-344-9401

E-Mail: tbradley@cdims.com

CDH-R-126-2.0-ARID-Dry Units

<u>Model</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
CDH-R-126-2.0-E	2,000	Electric	91 5/8"	29 1/8"	50"	800 lbs
CDH-R-126-2.0-G	2,000	Gas	91 5/8"	29 1/8"	50"	800 lbs

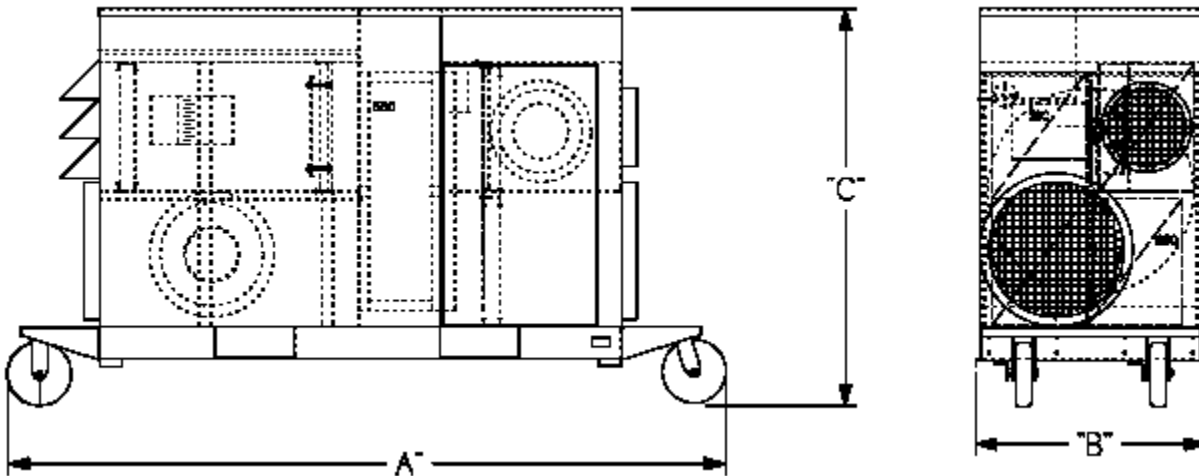

Model	Air Volume	Static Pressure External	Moisture Removal	Moisture Removal	Moisture Removal	Moisture Removal	Moisture Removal	Moisture Removal
			Lbs/Hr	Gallons/Day	Lbs/Hr	Gallons/Day	Lbs/Hr	Gallons/Day
CDH-R-126-2.0-E	2,000	2.0	50	143	42	120	25	71
CDH-R-126-2.0-G	2,000	2.0	50	143	42	120	25	71

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric	Electric	Gas	Gas	CFH Gas Max Usage NG	Gallon/HR Max Usage LP
			Reactivation Load	Reactivation FLA Load	Reactivation FLA Load	Reactivation FLA Load		
N/A	N/A	N/A	230/1/60	460/3/60	460/3/60	575/3/60	N/A	N/A
1/2"	7-14" w.c.	7-14" w.c.	30	N/A	15	15	120	1.8

Available Accessories:

- (2) Swivel Locking and (2) Fixed Castors
- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting
- 18" Round Supply Connections
- 20" Round Supply Connections
- 10" Round Reactivation Connections
- 12" Round Reactivation Connections
- Round Connections

