



Application and Sales Office:

29235 Lorie Ln. PO Box 1013

Wixom, MI 48393-1013


Phone 248-344-7236

Fax 248-344-9401

E-Mail: tbradley@cdims.com

CDH-R-130-ARID-Dry Units

| <u>Model</u> | <u>CFM</u> | <u>Fuel Type</u> | <u>"A" Dim.</u> | <u>"B" Dim.</u> | <u>"C" Dim.</u> | <u>Weight</u> |
|--------------|------------|------------------|-----------------|-----------------|-----------------|---------------|
| CDH-R-130 | 3,000 | Gas or Electric | 147" | 50 1/2" | 85" | 4400 lbs |
| CDH-R-130 | 3,000 | Dual | 169" | 50 1/2" | 85" | 5100 lbs |

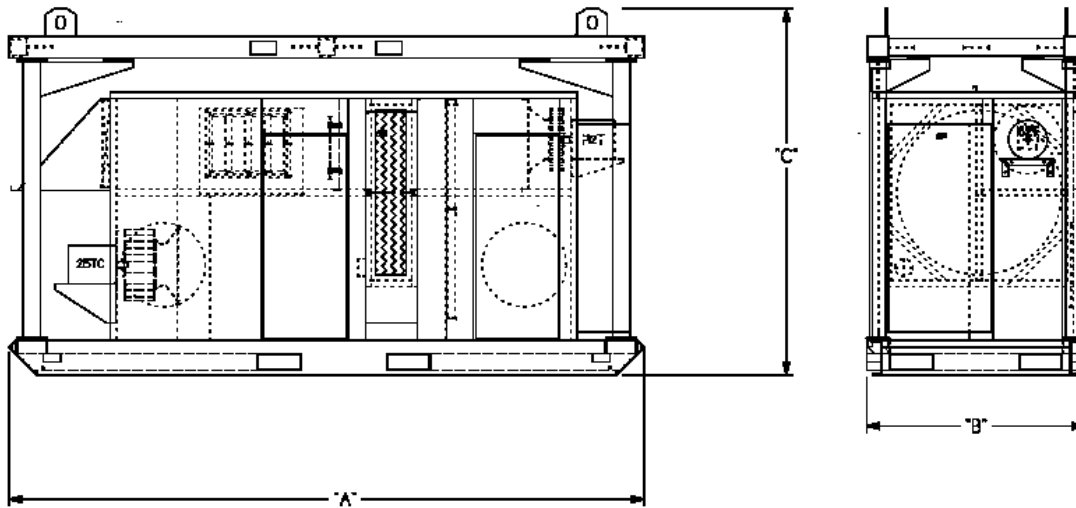

| Air Volume | Static Pressure External | Moisture Removal Lbs/Hr 80°/60% RH | Moisture Removal Gallons/Day 80°/60% RH | Moisture Removal Lbs/Hr 55°/80% RH | Moisture Removal Gallons/Day 55°/80% RH | Moisture Removal Lbs/Hr 40°/80% RH | Moisture Removal Gallons/Day 40°/80% RH |
|------------|--------------------------|------------------------------------|---|------------------------------------|---|------------------------------------|---|
| 3,000 | 2.0 | 84 | 242 | 70 | 202 | 40 | 115 |

| Pipe Size | LP Inlet Pressure | Natural Gas Inlet Pressure | Electric Reactivation Load 230/1/60 | Electric Reactivation FLA Load 460/3/60 | Gas Reactivation FLA Load 460/3/60 | CFH Gas Max Usage NG | Gallon/HR Max Usage LP |
|-----------|-------------------|----------------------------|-------------------------------------|---|------------------------------------|----------------------|------------------------|
| 3/4" | 7-14" w.c. | 7-14" w.c. | N/A | 90 | 10 | 200 | 2.2 |



Available Accessories:

- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting
- 18" or 20" Round Connections
- Ductwork, layflat and clamps