



**Application and Sales Office:**

29235 Lorie Ln. PO Box 1013

Wixom, MI 48393-1013


Phone 248-344-7236

Fax 248-344-9401

E-Mail: tbradley@cdims.com

**CDH-R-133-ARID-Dry Units**

<u>Model</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
CDH-R-133-E	4,000	Electric	90"	48 1/4"	66"	1,600 lbs
CDH-R-133-G	4,000	Gas	90"	48 1/4"	66"	1,600 lbs

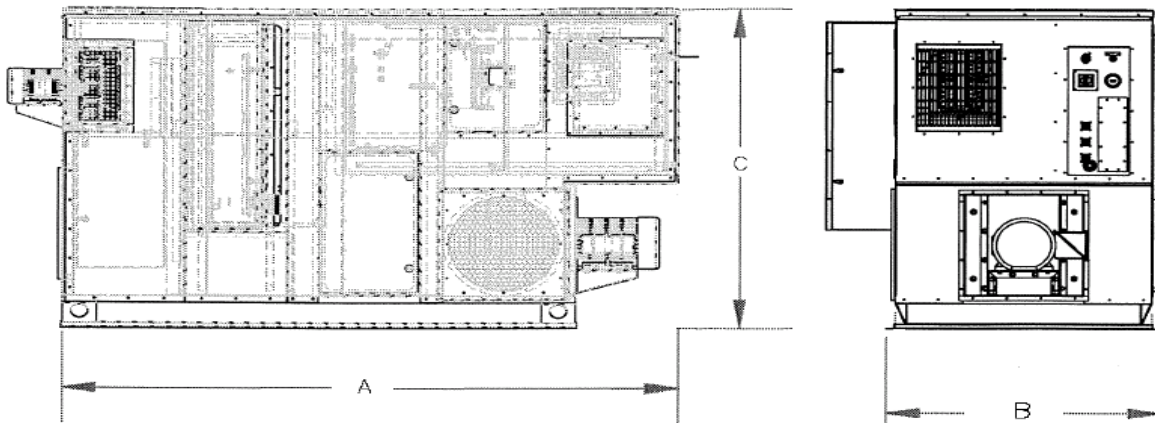

Model	Air Volume	Static Pressure External	Moisture Removal	Moisture Removal	Moisture Removal	Moisture Removal	Moisture Removal	Moisture Removal
			Lbs/Hr	Gallons/Day	Lbs/Hr	Gallons/Day	Lbs/Hr	Gallons/Day
CDH-R-133-E	4,000	4.0	100	286	84	240	50	142
CDH-R-133-G	4,000	4.0	100	286	84	240	50	142

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric	Electric	Gas	Gas	CFH Gas	Gallon/HR
			Reactivation Load	Reactivation FLA Load	Reactivation FLA Load	Reactivation FLA Load	Max Usage NG	Max Usage LP
N/A	N/A	N/A	230/1/60	460/3/60	460/3/60	575/3/60	N/A	N/A
1"	7-14" w.c.	7-14" w.c.	60	N/A	30	30	240	3.6

**Available Accessories:**

- (2) Swivel Locking and (2) Fixed Castors
- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting
- 18" Round Supply Connections
- 20" Round Supply Connections
- 10" Round Reactivation Connections
- 12" Round Reactivation Connections
- Round Connections

