



**Application and Sales Office:**

29235 Lorie Ln. PO Box 1013

Wixom, MI 48393-1013


Phone 248-344-7236

Fax 248-344-9401

E-Mail: tbradley@cdims.com

**CDH-R-138RL-ARID-Dry Units**

<u>Model</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
CDH-R-138	5,000	Gas or Electric	170"	49"	79"	5000 lbs
CDH-R-138	5,000	Dual	170"	49"	79"	5000 lbs

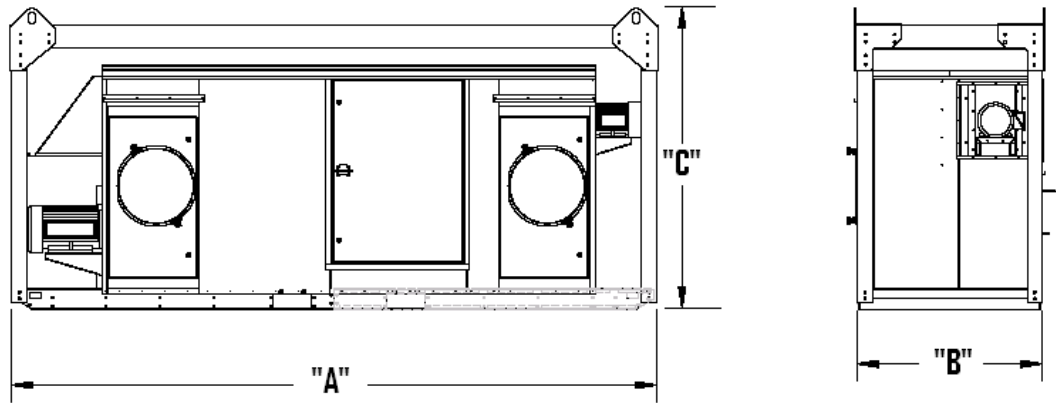

Air Volume	Static Pressure External	Moisture Removal Lbs/Hr 80°/60% RH	Moisture Removal Gallons/Day 80°/60% RH	Moisture Removal Lbs/Hr 55°/80% RH	Moisture Removal Gallons/Day 55°/80% RH	Moisture Removal Lbs/Hr 40°/80% RH	Moisture Removal Gallons/Day 40°/80% RH
5,000	5.0	136	392	115	331	75	216

Pipe Size	LP Inlet Pressure	Natural Gas Inlet Pressure	Electric Reactivation Load 230/1/60	Electric Reactivation FLA Load 460/3/60	Gas Reactivation FLA Load 460/3/60	CFH Gas Max Usage NG	Gallon/HR Max Usage LP
¾"	7-14" w.c.	7-14" w.c.	N/A	138	13	400	4.4



**Available Accessories:**

- Remote Humidistat
- Cooling Coil Modules
- Heating Coil Modules
- Trailer Mounting with generators
- 5.0 Static Pressure External
- 18" or 20" Round Connections